

About MIDA


Shanghai Mida Cable Group Limited wholly owned subsidiary Shanghai Mida EV Power Co., Ltd. and Shenzhen Mida EV Power Co., Ltd. Shanghai Mida New Energy Co., Ltd. Wuxi Mida New Energy Co., Ltd. Your first commercial EV charging station starts here!

With the rapid growth of global EV market, the demand of EV charging stations is on the rise. Building a site of public EV charging from scratch requires comprehensive planning and careful evaluation of charging infrastructure solutions. MIDA provides you with a variety of photovoltaic-storage-charging integrated power solutions consisting of consulting and designing, construction and installation, system commissioning, operation and maintenance, as well as a one-stop supply of hardware and software products.

www.midapower.com

One-stop Solution

For DC EV Charger

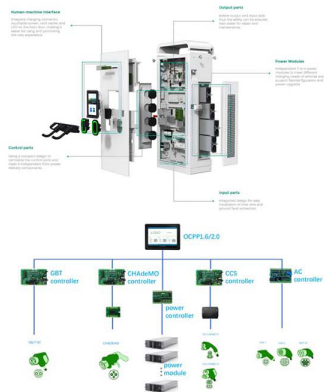

www.midapower.com

DC Charger Housing



www.midapower.com

DC Charging Connector

NACS DC Charging Connector

Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

CCS Combo1 EV Connector

Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

CCS Combo2 EV Connector

Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

GB/T EV Connector

Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

CHAdemo EV Connector

Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

www.midapower.com

EV Charger Power Module

Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

30KW AC-DC EV Charger Module

Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

40KW AC-DC EV Charger Module

Model	DC150V-40kW
Rated voltage	DC150V
Rated power	40kW
Rated current	160A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

60KW AC-DC EV Charger Module

Model	DC150V-60kW
Rated voltage	DC150V
Rated power	60kW
Rated current	240A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

www.midapower.com



Address: No.30 of Maoyuan Road, Fengshan District Shanghai 201400, China
Phone: +86-21-80278206
Email: info@midapower.com
Sales@midapower.com
www.midapower.com
www.midamodule.com
www.midasave.com

CMS



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

PMS



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

SECC



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Card Reader



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Touch Screen



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

www.midapower.com

Main Circuit Breaker



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Fuses & Shunts



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

AC Contactor



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

DC Contactor



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Surge Protector



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

www.midapower.com

Lightning Protection Switch



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Switching Power Supply



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Insulation Monitoring Module



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Leakage Current Sensor



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Full Netcom 4G Router



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Intermediate Relay



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

www.midapower.com

Limit Switch



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Emergency Stop Button



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Energy Meter



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

EV Cable Reel



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

Fan



Model	DC150V-30kW
Rated voltage	DC150V
Rated power	30kW
Rated current	150A
Rated temperature	40°C
Rated efficiency	>95%
Rated lifetime	>10 years

www.midapower.com

ONE-STOP SOLUTION FOR DC CHARGING STATION



Shenzhen Mida EV Power Co., Ltd.
Shanghai Mida EV Power Co., Ltd.